



Heavy Duty Horizontal Slurry Pump Electric Sludge Abrasion Corrosion Resistant

Our Product Introduction

Basic Information

- Place of Origin: Sichuan, China
- Brand Name: horizontal-slurrypump.com
- Certification: ISO9001
- Model Number: OEM
- Minimum Order Quantity: 1 set
- Price: USD500-5000/set
- Packaging Details: free fumigation export wooden box packaging
- Delivery Time: 25 working days after receiveing advance payment
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram, Paypal
- Supply Ability: 300 sets per month



Product Specification

- Theory: Centrifugal Pump
- Max Flow: 3000 M³/h
- Max Head: 130 M
- Min Head: 10m
- Structure: Single Stage
- Voltage: 380V Or Higher
- Pressure: High Pressure
- Warranty: One Year
- Power: Electric
- Application: Pumping Slurry
- Highlight: **horizontal centrifugal slurry pump**

for more products please visit us on horizontal-slurrypump.com

Product Description

Heavy Duty Horizontal Slurry Pump Electric Sludge Pump Abrasion Corrosion Resistant

Detailed Characteristic


1. cantilever, horizontal centrifugal slurry pump
2. interchangeable wear-resistant metal lining, and the impeller is made of wear-resistant metal or rubber material.
3. shaft seal can be used packing seal or pay impeller pressure relief cover seal. The outlet position of the pump can be installed and used by rotating 8 different angles at 45° intervals as required.

Usage


It can transfer slurry containing impurities such as sand, quartz, cinder, iron slag, stone, limestone, etc./ and the diameter of the particles can reach up to 135mm



Technical Range

	Model: ZJ-series horizontal slurry pump
	Discharge Size: 20mm~350mm
	Inlet Size: 32mm~400mm
	Capacity: 4 ~ 3000 m³/h
	Head: 10 ~ 130 m
	Maximal Efficiency: 70%
	NPSH: 0m~3m
	Allowable Max Motor Power: 315 kw
Impeller	Allowed Max Particle Size: 20 mm
Vanes: 5/6	Seal Type: step-down dynamic seal
Type: closed/ half open	Pump Weight: up to 3000kg
Material: Metal (according to working conditions)	RPM: 1450 r/min

Structure

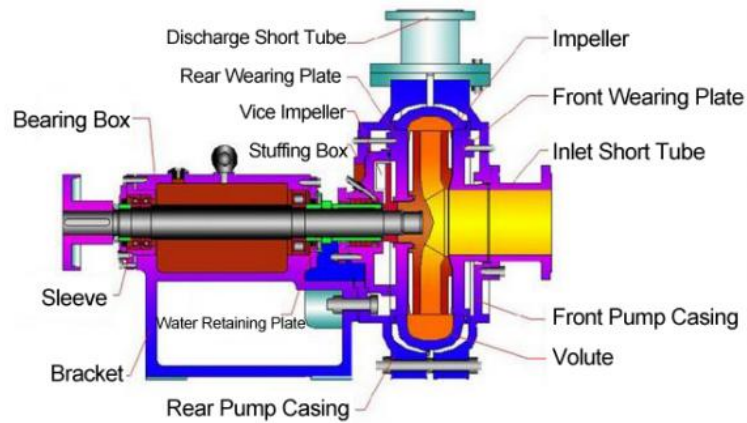

Product Picture



Details

The impeller, either elastomer, stainless steel or high-chrome material, is the main rotating component which normally has

vanes to impart the centrifugal force to the liquid. We usually use high chromium, which is wear resistant, corrosion resistant, not afraid of most of solid parts.



Our Service

Pre-sale service


1. Consulting and consulting support.
2. Sample test support.
3. View our factory.


After sales service

1. Train how to install the machine and train how to use the machine.
2. Video demonstration, operation guide
3. Engineers can repair machinery overseas.

 **ROMAN Beijing Silk Road Enterprise Management Services Co.,LTD**

 0086-17773109286

 jeffreyth@slurrypump.com

 horizontal-slurrypump.com

Floor 5, 2nd Building, Zhonglu Industrial Zone, Shenzhen City, Guangdong Province China (Mainland)